


Phonak PilotOne

Technical Data

Phonak PilotOne focuses on the essentials when it comes to discreet control over the hearing instruments. This exclusive remote control was designed for maximal usability. The large buttons, use of standard battery and its ergonomic design guarantee ease of use.



Description

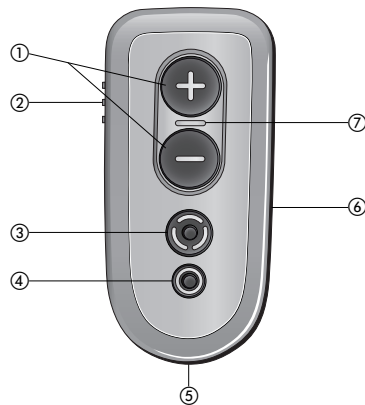

- 1 FlexControl / Volume
- 2 PilotOne buttons lock
- 3 Program change
- 4 "Home"-Button
- 5 Eyelet for keyring lanyard
- 6 Battery door
- 7 PilotOne status light

Accessories

- Keyring lanyard
- Alkaline Battery 1.5 V

(Contents may vary depending on country)

General information

Dimensions:	L x W x H: 84 x 40 x 16 mm (3.3 x 1.6 x 0.7 inches)
Weight:	45 g (including battery)
Color:	Palladium/Black
Operating conditions:	-10°C to +55°C / < 95% relative humidity (non condensing)
Storage and transportation conditions:	-20°C to +60°C / < 90% relative humidity (non condensing)

Power supply

Battery: Alkaline 1.5 V, type AAA, LR03 or AM4
(use of rechargeable batteries, e.g. NiMH, is not recommended)

Operating time: 12 month at average usage

Radio information

The active radio technology depends on the hearing instrument type.

	HiBAN	FSK
Antenna type:	Integrated ferrite antenna	
Operation frequency:	10.6 MHz	40.96 kHz
Occupied bandwidth (99% BW):	300 kHz	3.84 kHz
Field Strength:	< -11 dB μ A/m @ 10 m	< 10 dB μ A/m @ 10 m
Operating range to hearing instrument:	100 cm (40')	

Standards

Europe

Radiocom: EN 300330
CFR 47 Part 15 subpart C
RSS-210 Issue 7

EMC: EN 60601-1-2

El. Safety: EN 60601-1
